

DOL T FICHA TÉCNICA

RECESSED APPLICATION


LED | 230V/50Hz | IP20



STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

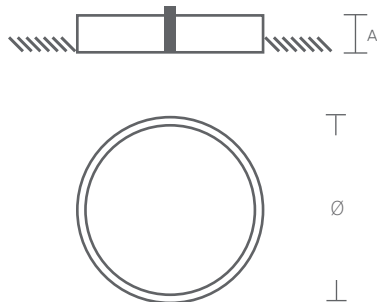

PRODUCT DESCRIPTION

Circular LED luminaire for recessed application, trimless.

Extruded aluminum body coated with epoxy polyester.

Opal polycarbonate diffuser.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.

CRI>80, 65.000h of useful life.

@L80, B10, Ta 25°C

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 4-anthracite/ 6- grey/
8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF

2- DALI - Flow regulation

4- W - Tunable white

DOL T

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
Ø 220x80	15	2400	DOL22T.015.LK.AED
Ø 320x80	15	2050	DOL32T.015.LK.AED
Ø 320x80	29	4100	DOL32T.029.LK.AED
Ø 420x80	17	2350	DOL42T.017.LK.AED
Ø 420x80	34	4700	DOL42T.034.LK.AED
Ø 620x80	41	7300	DOL62T.041.LK.AED
Ø 620x80	85	14000	DOL62T.085.LK.AED
Ø 905x125	104	19500	DOL90T.104.LK.AED
Ø 905x125	143	27500	DOL90T.143.LK.AED
Ø 1205x125	110	22000	DOL12T.110.LK.AED
Ø 1205x125	190	37500	DOL12T.190.LK.AED