

OVAL DATASHEET SURFACE APPLICATION


LED | 230V/50Hz | IP65



STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

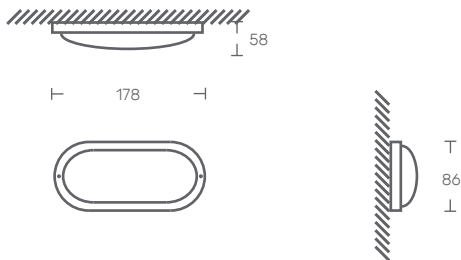

PRODUCT DESCRIPTION

LED luminaire for surface-mounted application on the wall or ceiling.
Polycarbonate body.

LIGHT SOURCE

LED 15W
CRI>80, L80/B50, FP>0.9, 25.000 of useful life.

AVAILABLE COLOR/FINISH



1-white

AVAILABLE LIGHT TEMPERATURE/ COLOR



3000K / 4000K

AVAILABLE DIFFUSER



0 - opaline

AVAILABLE DRIVER

1- HF - ON/OFF

OVAL

POWER (W)	FLOW (lm)	CODE
15	1250	OVAL.015.LK.AED