

## TANK DATASHEET SURFACE APPLICATION

LED | 230V/50Hz | IP65 | IK08



### PRODUCT DESCRIPTION

Industrial LED luminaire for surface-mounted application.  
Polycarbonate body and diffuser.

### LIGHT SOURCE

LED, 220-240VAC-50/60Hz.  
CRI>80, L90, B10, Ta25°C, 50.000h of useful life.

### AVAILABLE COLOR/FINISH



6-grey

### AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K / 3000K / 4000K / 6500K

### AVAILABLE DIFFUSER



0 - opaline



### AVAILABLE DRIVER

1- HF - ON/OFF

STANDARTS: EN 60598-1, EN 60598-2-1



### TECHNICAL DRAWING

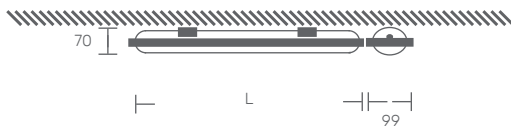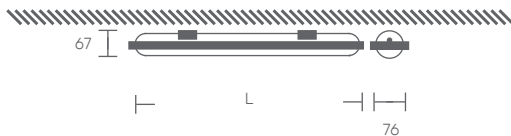

#### TANK

DIMENSIONS (mm)	POWER (w)	FLOW (lm)	CODE
600x76x76	12	1200	TANK.012.LK.610
600x76x76	16	2800	TANK.016.LK.610
600x99x70	24	2400	TANK.024.LK.610
600x99x70	32	5600	TANK.032.LK.610
1200x76x67	25	2500	TANK.025.LK.610
1200x76x67	33	5600	TANK.033.LK.610
1200x99x70	50	5000	TANK.050.LK.610
1200x99x70	64	12000	TANK.064.LK.610
1500x76x67	30	3000	TANK.030.LK.610
1500x76x67	40	7000	TANK.040.LK.610
1500x99x70	60	6000	TANK.060.LK.610
1500x99x70	80	14000	TANK.080.LK.610