


## ARU O DATASHEET RECESSED APPLICATION


LED | 230V/50Hz | IP54



STANDARTS: EN 60598-1, EN 60598-2-1



### TECHNICAL DRAWING

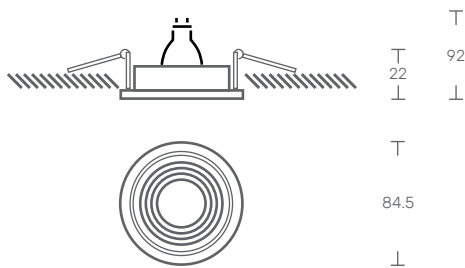

### PRODUCT DESCRIPTION

Adjustable LED luminaire for recessed application.  
Epoxy-polyester lacquered aluminum frame.

### LIGHT SOURCE

GU10 Lamp  
or  
COB LED  
Driver LED, 220-240VAC-50/60Hz.  
CRI>90, 35.000h of useful life.

### AVAILABLE COLOR/FINISH



1-white/ 2-black/ 4-anthracite/ 5-brushed/  
6-grey

### AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K

### AVAILABLE DRIVER

X- Without driver  
1- HF - ON/OFF  
2- DALI - Flow regulation  
3- 1-10V - Flow regulation

#### ARU O - LED GU10

LED GU10	POWER (W)	FLOW (lm)	CODE
	6	600	ARUO.006.LK.AED
	8	825	ARUO.008.LK.AED
	-	-	ARUO.000.LK.AED

#### ARU O - LED COB

9	720	ARUO.009.LK.AED
12	960	ARUO.012.LK.AED