


ARU Q DATASHEET RECESSED APPLICATION

LED | 230V/50Hz | IP20

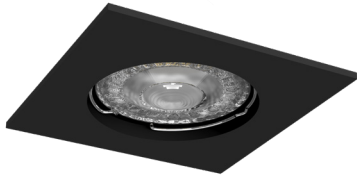

PRODUCT DESCRIPTION

LED luminaire for recessed application.
Epoxy-polyester lacquered aluminum frame.

LIGHT SOURCE

GU10 Lamp
or
COB LED
Driver LED, 220-240VAC-50/60Hz.
CRI>90, 35.000h of useful life.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 4-anthracite/ 5-brushed/
6-grey

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K


AVAILABLE DRIVER

X- Without driver
1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation

STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

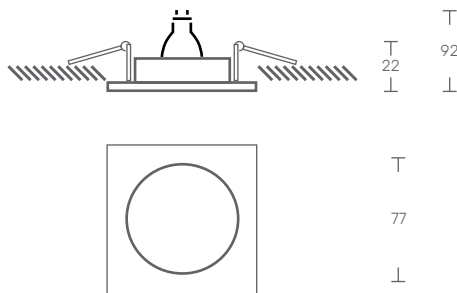

ARU Q - LED GU10

LED GU10	POWER (w)	FLOW (lm)	CODE
	6	600	ARUQ.006.LK.AED
	8	825	ARUQ.008.LK.AED
	-	-	ARUQ.000.LK.AED

ARU Q - LED COB

9	720	ARUQ.009.LK.AED
12	960	ARUQ.012.LK.AED