BOX E DATASHEET

RECESSED APPLICATION

LED | 230V/50Hz | IP40

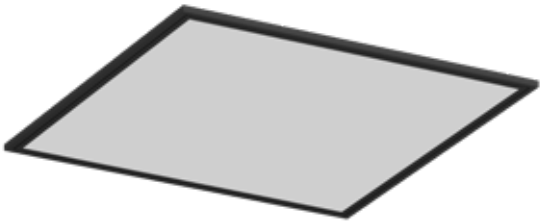

STANDARTS: EN 60598-1, EN 60598-2-1

C1 275x1175 C2 275x1475 C3 575x575

TECHNICAL DRAWING

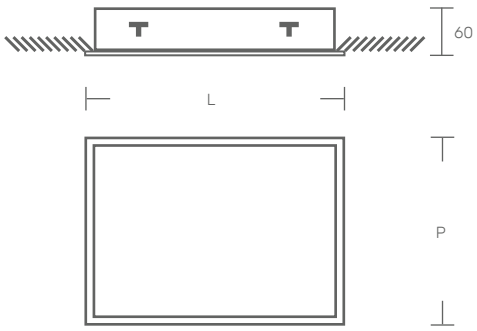

PRODUCT DESCRIPTION

LED luminaire for recessed application, with trim.
Lacquered steel body.
Opal polycarbonate diffuser.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 65.000h of useful life.
@L80, B10, Ta 25°.

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 4-anthracite/ 6- grey/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

TW

2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER

UGR <19

O -opaline/ P -microprismatic

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation
4- W - Bluetooth / Wifi

BOX E

	DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
C1	297x1197	28	4900	BOX30E.028.LK.AED
C1	297x1197	42	7200	BOX30E.042.LK.AED
C2	297x1497	43	6125	BOX30E.043.LK.AED
C2	297x1497	87	9000	BOX30E.087.LK.AED
C3	597x597	28	4900	BOX60E.028.LK.AED
C3	597x597	42	7200	BOX60E.042.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/