

BRIK DATASHEET RECESSED APPLICATION


LED | 230V/50Hz | IP65 | IK08



STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

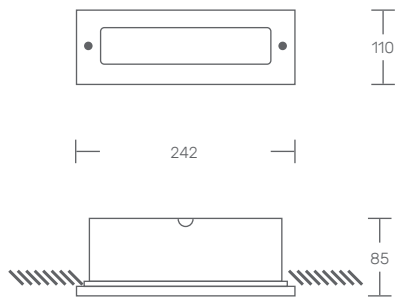

PRODUCT DESCRIPTION

LED luminaire for recessed application, with trim.

Polyamide body, stainless steel rim.
Polycarbonate diffuser.

LIGHT SOURCE

E27

ou

LED, 220-240VAC - 50/60Hz

CRI>80, L90,B10, Ta25°C, 80.000 of useful life

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 4-anthracite/ 6-grey/
9-stainless steel

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K / 3000K / 4000K / 6500K

AVAILABLE DIFFUSER



0 - opaline

AVAILABLE DRIVER

1- HF - ON/OFF

BRIK

	POWER (W)	FLOW (lm)	CODE
LED	6	1000	BRIK.006.LK.AED
E27	-	-	BRIK.000.LK.AED
Recessed box	-	-	BRIK.NEG.XX.XX