# DOT DATASHEET

RECESSED APPLICATION

LED | 230V/50Hz | IP65



STANDARTS: EN 60598-1, EN 60598-2-1

75

## TECHNICAL DRAWING

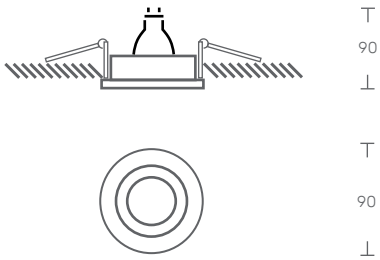


## PRODUCT DESCRIPTION

LED luminaire for recessed application, with trim.
Aluminum rim.

## LIGHT SOURCE

GU10 Lamp
or
COB LED
Driver LED, 220-240VAC-50/60Hz.
CRI>90, 35.000h of useful life.

## AVAILABLE COLOR/FINISH

1-white/ 2-black/ 4-anthracite/ 5-brushed/ 7-gold

## AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K/ 3000K/ 4000K

## AVAILABLE DIFFUSER

T - transparent

## AVAILABLE DRIVER

X- Without driver
1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation

---

**DOT - LED GU10**

| LED GU10 | POWER (W) | FLOW (lm) | CODE |
|---|---|---|---|
| | 6 | 600 | DOT.006.LK.AED |
| | 8 | 825 | DOT.008.LK.AED |
| | - | - | DOT.000.LK.AED |

**DOT - COB LED**

| | | |
|---|---|---|
| 9 | 1100 | DOT.009.LK.AED |
| 12 | 1500 | DOT.012.LK.AED |

KATOA Everything's Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/