


FLOW DATASHEET RECESSED APPLICATION


LED | 230V/50Hz | IP20



STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

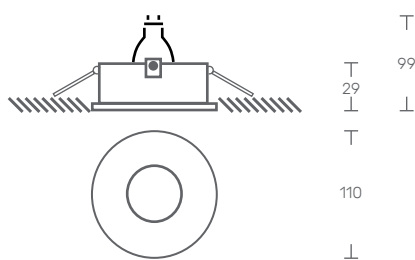

PRODUCT DESCRIPTION

LED luminaire for recessed application, with trim.

Epoxy polyester lacquered aluminum body.

LIGHT SOURCE

GU10 Lamp

or

COB LED

Driver LED, 220-240VAC-50/60Hz.

CRI>90, 35.000h of useful life.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 4-anthracite/ 6-grey

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K

AVAILABLE DRIVER

X- Without driver

1- HF - ON/OFF

2- DALI - Flow regulation

3- 1-10V - Flow regulation

FLOW - LED GU10

LED GU10	POWER (w)	FLOW (lm)	CODE
	6	600	FLOW.006.LK.AED
	8	825	FLOW.008.LK.AED
	-	-	FLOW.000.LK.AED

FLOW - COB LED

9	720	FLOW.009.LK.AED
12	960	FLOW.012.LK.AED