OFFICE DATASHEET

RECESSED APPLICATION

LED | 230V/50Hz | IP20 | IK03

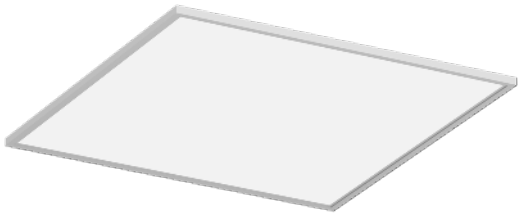

STANDARTS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

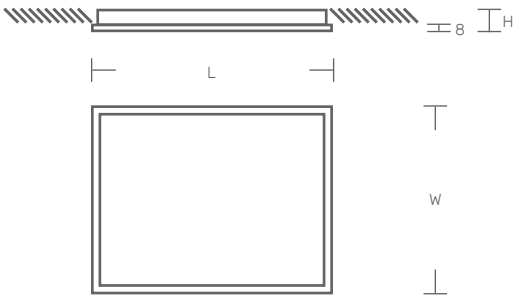

PRODUCT DESCRIPTION

LED luminaire for recessed application with tab for modular ceilings.
Lacquered steel body.
Opaline diffuser.

LIGHT SOURCE TRIDONIC

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 54.000h of useful life.
@L70, B30, Ta 25°C, UGR<19

AVAILABLE COLOR/FINISH

1-white

AVAILABLE LIGHT TEMPERATURE/ COLOR

3000K/ 4000K/ 6500K

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
4 - W- Bluetooth / Wifi

AVAILABLE APPLICATION



1-suspension kit



2-recessed springs

C1 587x587 C2 287x1187 C3 587x1187

*fluxo real - fluxo luminoso à saída do difusor

OFFICE

	DIMENSIONS (mm) (LxWxH)	POWER (W)	REAL FLOW (lm)*	CODE
C1	595x595x33	28	3500	OFFICE60.028.LK.AED
C2	1195x295x33	28	3420	OFFICE120.028.LK.AED
C3	1195x595x35	52	6620	OFFICE120.052.LK.AED
	Suspension Kit	-	-	OFFICE.KIT.SUSP
	Recessed Springs	-	-	OFFICE.KIT.MOLAS

KATOA Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/