

## PARED 9 DATASHEET

### SURFACE APPLICATION

LED | 230V/50Hz | IP54



### PRODUCT DESCRIPTION

LED luminaire for surface-mounted application on the wall or ceiling.  
Die-cast aluminum body, thermo-lacquered with anti-aging additive.  
Tempered glass diffuser.

### LIGHT SOURCE

LED COB 9W  
CRI>80, L80/B50, 50.000h of useful life.

### AVAILABLE COLOR/FINISH



4-anthracite

### AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K / 3000K / 4000K

### AVAILABLE DIFFUSER




T - transparent

STANDARTS: EN 60598-1, EN 60598-2-1



### TECHNICAL DRAWING

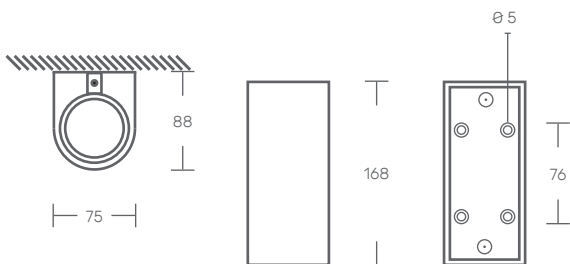

#### PARED 9

POWER (W)

9

FLOW (lm)

700

CODE

PARED9.009.LK.AED