

## PARED DATASHEET

### SURFACE APPLICATION


LED | 230V/50Hz | IP54



STANDARTS: EN 60598-1, EN 60598-2-1



### TECHNICAL DRAWING

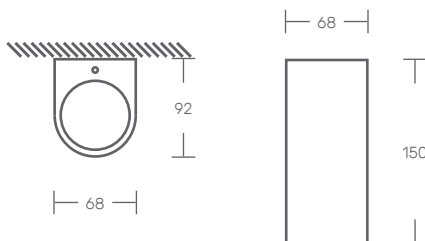

### PRODUCT DESCRIPTION

LED luminaire with direct and indirect light for surface application on the wall or ceiling. Lacquered aluminum body. Tempered glass diffuser.

### LIGHT SOURCE

GU10 Lamp

### AVAILABLE COLOR/FINISH



1-white/ 2-black/ 4-anthracite/ 6- grey

### AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K / 3000K / 4000K

### AVAILABLE DIFFUSER



T - transparent

#### PARED

LED GU10	POWER (w)	FLOW (lm)	CODE
	2x6	2x600	PARED.006.LK.AED
	2x8	2x825	PARED.008.LK.AED
	-	-	PARED.000.LK.AED