PUK DATASHEET

RECESSED APPLICATION

LED | 12V | IP20



STANDARTS: EN 60598-1, EN 60598-2-1

85x85

TECHNICAL DRAWING

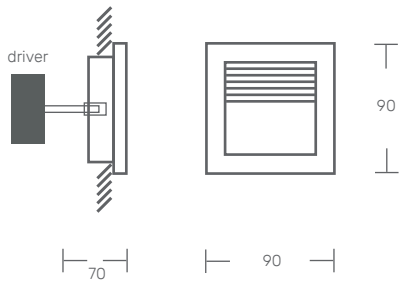

PRODUCT DESCRIPTION

LED luminaire for recessed application on the wall, with trim.
Epoxy polyester lacquered aluminum body.

LIGHT SOURCE

LED 3W
Driver LED, 220-240VAC -50/60Hz
CRI>80, FP>0.9, 50.000h of useful life.

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 4-anthracite/ 6-grey

AVAILABLE LIGHT TEMPERATURE/ COLOR

3000K/ 4000K

AVAILABLE DRIVER*

1- HF - ON/OFF
*remote driver



Recessed box not included

PUK

	POWER (W)	FLOW (lm)	CODE
	3	200	PUK.003.LK.AED
Recessed box	-	-	PUK.NEG.XX.XX

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/