


## SCUTT 30 E DATASHEET

RECESSED APPLICATION


LED | 230V/50HZ | IP40

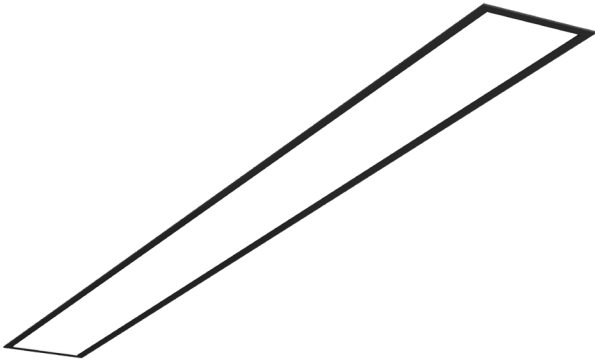

STANDARTS: EN 60598-1, EN 60598-2-1



### TECHNICAL DRAWING

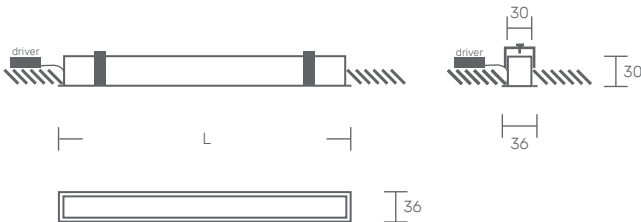

### PRODUCT DESCRIPTION

LED luminaire for recessed application with trim.

Anodized extruded aluminum profile, 30mm wide and 36mm with finial trim. Clip-on diffuser in opal polycarbonate.

### LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz. CRI>80, 80.000h of useful life. @L90, B10, Ta 25°C.

### AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural/ 4-anthracite/ 8-RAL

### AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

### AVAILABLE DIFFUSER



0 -opaline / N -black

### AVAILABLE DRIVER

- 1- HF - ON/OFF
- 2- DALI - Flow regulation
- 3- 1-10V - Flow regulation
- 4- W - Tunable white



Available with emergency kit

1-3h

### SCUTT 30 E

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
570x30x30	16	2400	SC30E.0570.LK.AED
710x30x30	20	3000	SC30E.0710.LK.AED
850x30x30	24	3600	SC30E.0850.LK.AED
990x30x30	28	4200	SC30E.0990.LK.AED
1130x30x30	32	4800	SC30E.1130.LK.AED
1270x30x30	36	5400	SC30E.1270.LK.AED
1410x30x30	40	6000	SC30E.1410.LK.AED
1550x30x30	44	6600	SC30E.1550.LK.AED
1690x30x30	48	7200	SC30E.1690.LK.AED
1830x30x30	52	7800	SC30E.1830.LK.AED
1970x30x30	56	8400	SC30E.1970.LK.AED
2110x30x30	60	9000	SC30E.2110.LK.AED
2250x30x30	64	9600	SC30E.2250.LK.AED

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
2390x30x30	68	10200	SC30E.2390.LK.AED
2530x30x30	72	10800	SC30E.2530.LK.AED
2670x30x30	76	11400	SC30E.2670.LK.AED
2810x30x30	80	12000	SC30E.2810.LK.AED
2950x30x30	84	12600	SC30E.2950.LK.AED
3090x30x30	88	13200	SC30E.3090.LK.AED
3230x30x30	92	13800	SC30E.3230.LK.AED
3370x30x30	96	14400	SC30E.3370.LK.AED
3510x30x30	100	15000	SC30E.3510.LK.AED
3650x30x30	104	15600	SC30E.3650.LK.AED
3790x30x30	108	16200	SC30E.3790.LK.AED
3930x30x30	112	16800	SC30E.3930.LK.AED

Possibility of custom lines - On request