


## SCUTT 30 DATASHEET

SURFACE APPLICATION


LED | 230V/50Hz | IP40

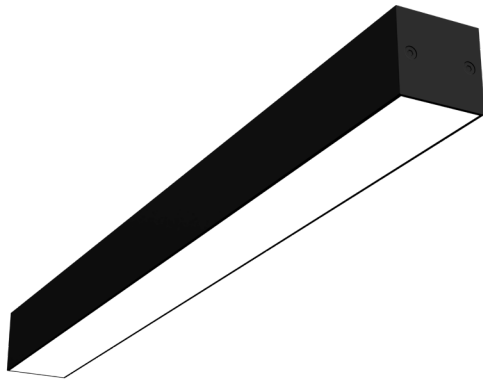

STANDARTS: EN 60598-1, EN 60598-2-1



### TECHNICAL DRAWING

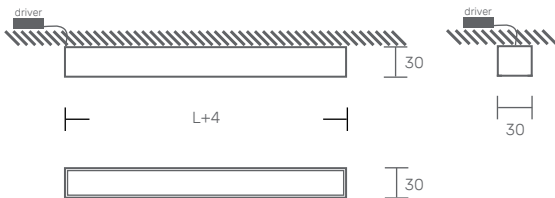

### PRODUCT DESCRIPTION

LED luminaire for surface-mounted application.

Anodised extruded aluminum profile, 30mm wide.

Clip-on diffuser in opal polycarbonate.

### LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.

CRI>80, 100.000h of useful life.

@L90, B10, Ta 25°.

### AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural/ 4-anthracite/ 8-RAL

### AVAILABLE LIGHT TEMPERATURE/COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

### AVAILABLE DIFFUSER



0 -opaline / N -black

### AVAILABLE DRIVER

1- HF - ON/OFF

2- DALI - Flow regulation

3- 1-10V - Flow regulation

4- W - Bluetooth/Wifi



Available with emergency kit

### SCUTT 30

\*Profile cut dimensions without tops or tabs.

DIMENSIONS Lx30x30 (mm)*	POWER (w)	FLOW(lm)	CODE	DIMENSIONS Lx30x30 (mm)*	POWER (w)	FLOW (lm)	CODE
570x30x30	16	2800	SC30.0570.LK.AED	2390x30x30	68	11900	SC30.2390.LK.AED
710x30x30	20	3500	SC30.0710.LK.AED	2530x30x30	72	12600	SC30.2530.LK.AED
850x30x30	24	4200	SC30.0850.LK.AED	2670x30x30	76	13300	SC30.2670.LK.AED
990x30x30	28	4900	SC30.0990.LK.AED	2810x30x30	80	14000	SC30.2810.LK.AED
1130x30x30	32	5600	SC30.1130.LK.AED	2950x30x30	84	14700	SC30.2950.LK.AED
1270x30x30	36	6300	SC30.1270.LK.AED	3090x30x30	88	15400	SC30.3090.LK.AED
1410x30x30	40	7000	SC30.1410.LK.AED	3230x30x30	92	16100	SC30.3230.LK.AED
1550x30x30	44	7700	SC30.1550.LK.AED	3370x30x30	96	16800	SC30.3370.LK.AED
1690x30x30	48	8400	SC30.1690.LK.AED	3510x30x30	100	17500	SC30.3510.LK.AED
1830x30x30	52	9100	SC30.1830.LK.AED	3650x30x30	104	18200	SC30.3650.LK.AED
1970x30x30	56	9800	SC30.1970.LK.AED	3790x30x30	108	18900	SC30.3790.LK.AED
2110x30x30	60	10500	SC30.2110.LK.AED	3930x30x30	112	19600	SC30.3930.LK.AED
2250x30x30	64	11200	SC30.2250.LK.AED				

Possibility of custom lines - On request