


SCUTT 47 E DATASHEET

RECESSED APPLICATION


LED | 230V/50Hz | IP40

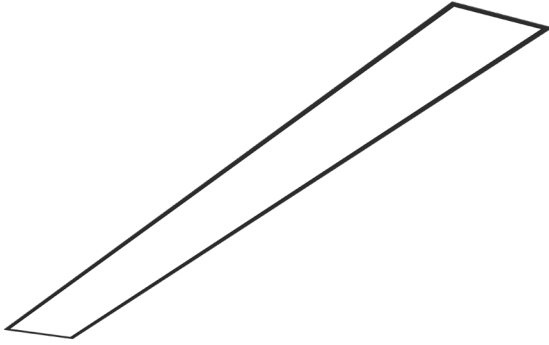

STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

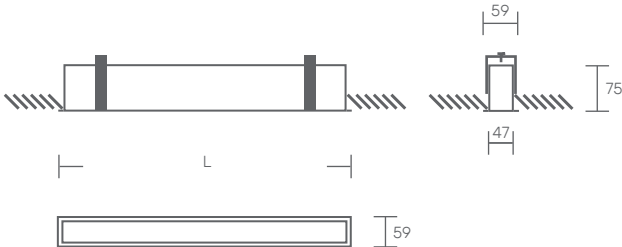

PRODUCT DESCRIPTION

LED luminaire for recessed ceiling application with trim.

Extruded anodised aluminum profile 47mm wide, 59mm with finial trim.

Clip-on diffuser in opal polycarbonate.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.

CRI>80, 80.000h of useful life.

@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural/ 4-anthracite/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



O -opaline / N -black / P -microprismatic

AVAILABLE DRIVER

- 1- HF - ON/OFF
- 2- DALI - Flow regulation
- 3- 1-10V - Flow regulation
- 4- W - Tunable white



Available with emergency kit

1-3h

SCUTT 47 E

DIMENSIONS (mm)	POWER (w)	FLOW (lm)	CODE	DIMENSIONS (mm)	POWER (w)	FLOW (lm)	CODE
570x47x75	16	2800	SC47E.0570.LK.AED	2390x47x75	68	11900	SC47E.2390.LK.AED
710x47x75	20	3500	SC47E.0710.LK.AED	2530x47x75	72	12600	SC47E.2530.LK.AED
850x47x75	24	4200	SC47E.0850.LK.AED	2670x47x75	76	13300	SC47E.2670.LK.AED
990x47x75	28	4900	SC47E.0990.LK.AED	2810x47x75	80	14000	SC47E.2810.LK.AED
1130x47x75	32	5600	SC47E.1130.LK.AED	2950x47x75	84	14700	SC47E.2950.LK.AED
1270x47x75	36	6300	SC47E.1270.LK.AED	3090x47x75	88	15400	SC47E.3090.LK.AED
1410x47x75	40	7000	SC47E.1410.LK.AED	3230x47x75	92	16100	SC47E.3230.LK.AED
1550x47x75	44	7700	SC47E.1550.LK.AED	3370x47x75	96	16800	SC47E.3370.LK.AED
1690x47x75	48	8400	SC47E.1690.LK.AED	3510x47x75	100	17500	SC47E.3510.LK.AED
1830x47x75	52	9100	SC47E.1830.LK.AED	3650x47x75	104	18200	SC47E.3650.LK.AED
1970x47x75	56	9800	SC47E.1970.LK.AED	3790x47x75	108	18900	SC47E.3790.LK.AED
2110x47x75	60	10500	SC47E.2110.LK.AED	3930x47x75	112	19600	SC47E.3930.LK.AED
2250x47x75	64	11200	SC47E.2250.LK.AED				

Possibility of custom lines - On request