


SCUTT 63 S DATASHEET

SUSPENDED APPLICATION

LED | 230V/50Hz | IP40

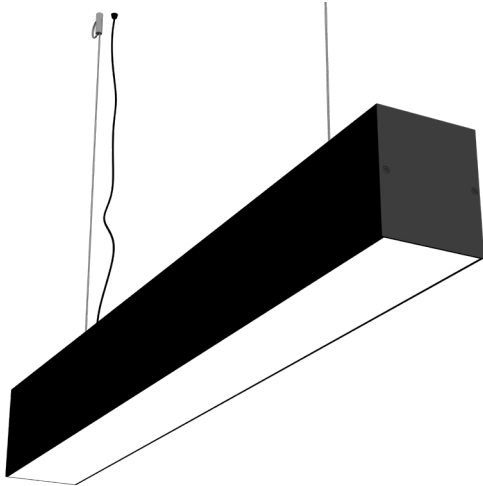


STANDARDS: EN 60598-1, EN 60598-2-1



Possibility of surface or recessed cablecup

TECHNICAL DRAWING

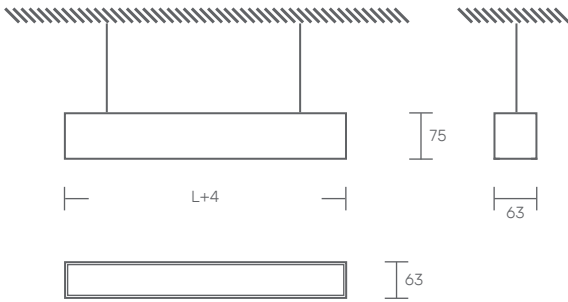

PRODUCT DESCRIPTION

LED luminaire for suspended ceiling application.

Anodised extruded aluminum profile, 63mm wide.

Clip-on diffuser in opal polycarbonate.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.

CRI>80, 100.000h of useful life.

@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural/ 4-anthracite/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



0 -opaline / N -black / P -microprismatic

AVAILABLE DRIVER

1- HF - ON/OFF

2- DALI - Flow regulation

3- 1-10V - Flow regulation

4- W - Bluetooth / Wifi



Available with emergency kit

*Profile cut dimensions without tops or tabs.

SCUTT 63 S

DIMENSIONS Lx63x75 (mm)*	POWER (w)	FLOW (lm)	CODE	DIMENSIONS Lx63x75 (mm)*	POWER (w)	FLOW (lm)	CODE
570x63x75	16	2800	SC63S.0570.LK.AED	2390x63x75	68	11900	SC63S.2390.LK.AED
710x63x75	20	3500	SC63S.0710.LK.AED	2530x63x75	72	12600	SC63S.2530.LK.AED
850x63x75	24	4200	SC63S.0850.LK.AED	2670x63x75	76	13300	SC63S.2670.LK.AED
990x63x75	28	4900	SC63S.0990.LK.AED	2810x63x75	80	14000	SC63S.2810.LK.AED
1130x63x75	32	5600	SC63S.1130.LK.AED	2950x63x75	84	14700	SC63S.2950.LK.AED
1270x63x75	36	6300	SC63S.1270.LK.AED	3090x63x75	88	15400	SC63S.3090.LK.AED
1410x63x75	40	7000	SC63S.1410.LK.AED	3230x63x75	92	16100	SC63S.3230.LK.AED
1550x63x75	44	7700	SC63S.1550.LK.AED	3370x63x75	96	16800	SC63S.3370.LK.AED
1690x63x75	48	8400	SC63S.1690.LK.AED	3510x63x75	100	17500	SC63S.3510.LK.AED
1830x63x75	52	9100	SC63S.1830.LK.AED	3650x63x75	104	18200	SC63S.3650.LK.AED
1970x63x75	56	9800	SC63S.1970.LK.AED	3790x63x75	108	18900	SC63S.3790.LK.AED
2110x63x75	60	10500	SC63S.2110.LK.AED	3930x63x75	112	19600	SC63S.3930.LK.AED
2250x63x75	64	11200	SC63S.2250.LK.AED				

Possibility of custom lines - On request