

TOP 63 E DATASHEET

RECESSED APPLICATION

LED | 230V/50Hz | IP20




STANDARTS: EN 60598-1, EN 60598-2-1



69xL

TECHNICAL DRAWING

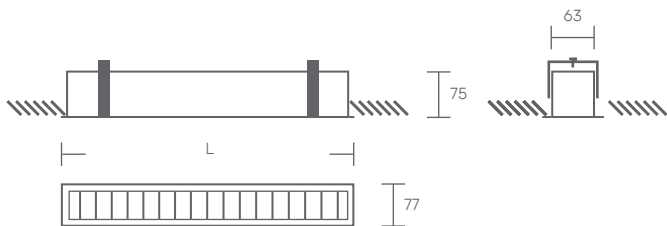

PRODUCT DESCRIPTION

LED luminaire for recessed application.
Anodised extruded aluminum profile,
63mm wide.
Shiny aluminum diffuser.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 80.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural/ 4-anthracite/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



A - shiny parabolic aluminum

AVAILABLE DRIVER

- 1- HF - ON/OFF
- 2- DALI - Flow regulation
- 3- 1-10V - Flow regulation
- 4- W - Tunable white



1-3h

Available with emergency kit

TOP 63 E

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
566x63x75	16	2800	TOP63E.0566.LK.AED
846x63x75	24	4200	TOP63E.0846.LK.AED
1126x63x75	32	5600	TOP63E.1126.LK.AED
1406x63x75	40	7000	TOP63E.1406.LK.AED

Possibility of custom lines - On request