TOP E DATASHEET

RECESSED APPLICATION

LED | 230V/50Hz | IP20

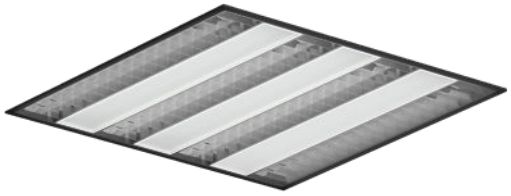

*ilustrative image

STANDARTS: EN 60598-1, EN 60598-2-1

C1 275x1175 C2 275x1475 C3 575x575

PRODUCT DESCRIPTION

LED luminaire for recessed ceiling application.
Aluminum body.
Bright parabolic aluminum reflector.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 53.000h useful life.
@L90, B10, Ta 25°C, UGR<19

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 4-anthracite/ 6-grey

AVAILABLE LIGHT TEMPERATURE/ COLOR

TW

2700K/ 3000K/ 4000K/ 6500K/ TW

TECHNICAL DRAWING

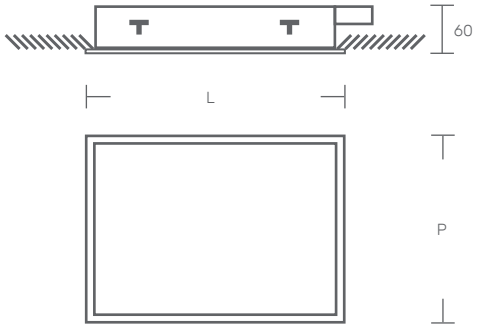

AVAILABLE DIFFUSER

A -Shiny parabolic aluminum.

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation
4- W - Bluetooth / Wifi

TOP E

	DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
C1	297x1197x60	64	11200	TOP30E.064.LK.AED
C2	297x1497x60	80	14000	TOP30E.080.LK.AED
C3	597x597x60	48	8400	TOP60E.048.LK.AED
C3	597x597x60	64	11200	TOP60E.064.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/