TOP DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP20

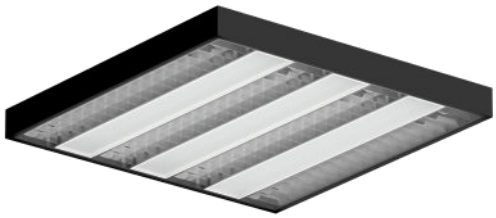

*ilustrative image

STANDARTS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

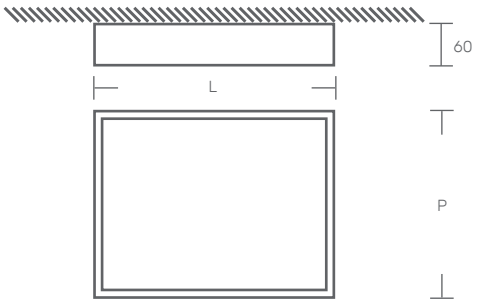

PRODUCT DESCRIPTION

LED luminaire for surface-mounted application.
Aluminum body.
Bright parabolic aluminum reflector.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 53.000h of useful life.
@L90, B10, Ta 25°C, UGR<19

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 4-anthracite/ 6-grey

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



A -Shiny parabolic aluminum.

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation
4- W - Bluetooth / Wifi

TOP

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
297x1197x60	64	11200	TOP30.064.LK.AED
297x1497x60	80	14000	TOP30.080.LK.AED
597x597x60	48	8400	TOP60.048.LK.AED
597x597x60	64	11200	TOP60.064.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/