


TRIM 2 DATASHEET

RECESSED APPLICATION


LED | 230V/50Hz | IP20

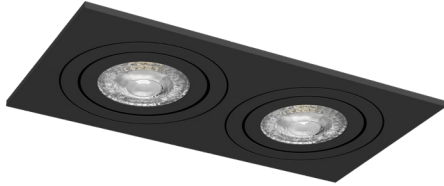

STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

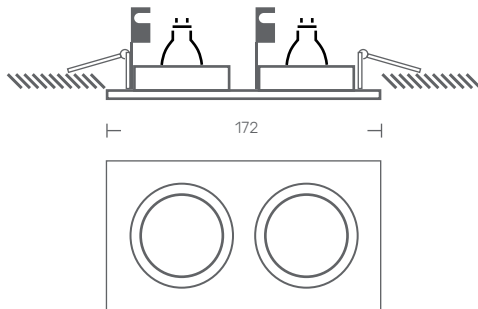

PRODUCT DESCRIPTION

Double LED luminaire, adjustable for recessed use, with trim.
Ring in brushed aluminum or epoxy polyester lacquered.

LIGHT SOURCE

GU10 Lamp
or
COB LED
Driver LED, 220-240VAC-50/60Hz.
CRI>90, 35.000h of useful life.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 4-anthracite/ 5-brushed/
6-grey

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K

AVAILABLE DRIVER

X- Without driver
1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation

TRIM 2 - LED GU10

LED GU10	POWER (w)	FLOW (lm)	CODE
	2x6	2x600	TRIM2.006.LK.AED
	2x8	2x825	TRIM2.008.LK.AED
	-	-	TRIM2.000.LK.AED

TRIM 2 - COB LED

2x9	2x720	TRIM2.009.LK.AED
2x12	2x960	TRIM2.012.LK.AED