TUB 30 DATASHEET

SPOTLIGHT

LED COB | 230V/50Hz | IP20



STANDARTS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

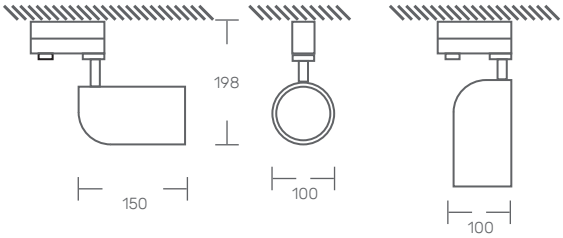

AVAILABLE APPLICATION



In track (standard)
code:
TREM.ADAP.XX.AXX



Recessed
Ø86mm
code: FL.ENC.86



Surface
Ø86x20mm
code: FL.SAL.86

PRODUCT DESCRIPTION

Two-axis swivel projector for application in three-phase/recessed/surface rail.
Injected aluminum body, coated with epoxy polyester.
Shiny aluminum reflector.
15°/38/60° beam opening angles.

LIGHT SOURCE

LED COB 30W
CRI>97, FP>0.9, UGR<19
30.000h of useful life.

AVAILABLE COLOR/FINISH

1-white/ 2-black

AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K/ 3000K/ 4000K

AVAILABLE DRIVER

1- HF - ON/OFF
2- TRIAC - Flow regulation

AVAILABLE DIFFUSER

T - transparent

TUB 30

POWER (W)	FLOW (lm)	CODE
30	3600	TUB30.030.LK.AED
30	3600	TUB30E.030.LK.AED
30	3600	TUB30SU.030.LK.AED

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/