

TUB 33 S DATASHEET

SPOTLIGHT


LED COB | 230V/50Hz | IP20



STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

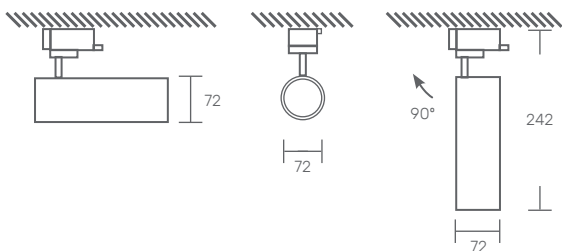

PRODUCT DESCRIPTION

Two-axis swivel projector for application in three-phase/recessed/surface rail. Injected aluminum body, coated with epoxy polyester. Shiny aluminum reflector. 15°/38°/60° beam opening angles.

LIGHT SOURCE

LED COB 33W
CRI>97, FP>0.95
35.000h of useful life.

AVAILABLE COLOR/FINISH



1-white/ 2-black

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K

AVAILABLE APPLICATION



In track (standard)
code:
TREM.ADAP.XX.AXX



Recessed
Ø86mm
code: FL.ENC.86



Surface
Ø86x20mm
code: FL.SAL.86

TUB 33 S

POWER (w)	FLOW (lm)	CODE
33	2800	TUB33S.033.LK.AED
33	2800	TUB33SE.033.LK.AED
33	2800	TUB33SSU.033.LK.AED