

TUB 9 DATASHEET

SPOTLIGHT


LED COB | 230V/50Hz | IP20



STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

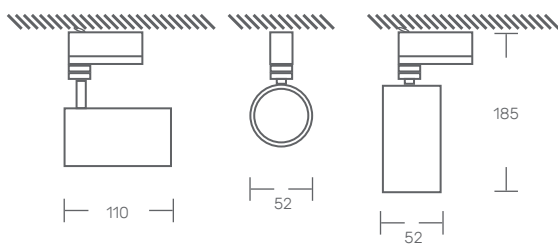

PRODUCT DESCRIPTION

Two-axis swivel projector for application in three-phase/recessed/surface rail. Injected aluminum body, coated with epoxy polyester. Shiny aluminum reflector. 15°/38°/60° beam opening angles.

LIGHT SOURCE

LED COB 9W
CRI>80, FP>0.9
30.000h of useful life.

AVAILABLE COLOR/FINISH




1-white/ 2-black

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K

AVAILABLE APPLICATION

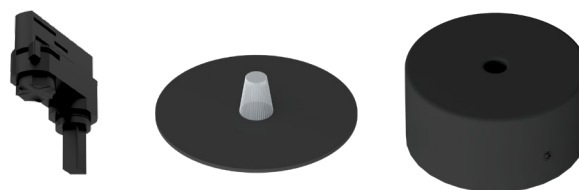

In track
E - Recessed in the ceiling
SU - Surface in the ceiling

TUB 9

POWER (w)	FLOW (lm)	CODE
9	1300	TUB9.009.LK.AED
9	1300	TUB9E.009.LK.AED
9	1300	TUB9SU.009.LK.AED