TUB DATASHEET

SPOTLIGHT

LED | GU10 | 230V/50Hz | IP20



STANDARTS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

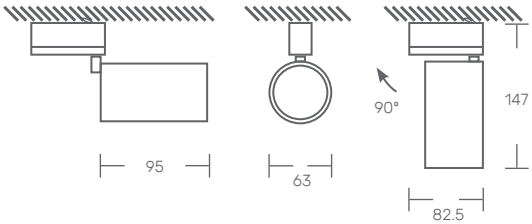

PRODUCT DESCRIPTION

Two-axis swivel projector for application in three-phase/recessed/surface rail.
Injected aluminum body, coated with epoxy polyester.

LIGHT SOURCE

GU10 lamp

AVAILABLE COLOR/FINISH

1-white/ 2-black

AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K/ 3000K/ 4000K

AVAILABLE DIFFUSER

T - transparent

AVAILABLE APPLICATION



In track (standard)
code:
TREM.ADAP.XX.AXX



Recessed
Ø56mm
code: FL.ENC.56



Surface
Ø56x20mm
code: FL.SAL.56

TUB

LED GU10	POWER (W)	FLOW (lm)	CODE
	6	600	TUB.006.LK.AED
	8	825	TUB.008.LK.AED
	-	-	TUB.000.LK.AED
	6	600	TUBE.006.LK.AED
	8	825	TUBE.008.LK.AED
	-	-	TUBE.000.LK.AED
	6	600	TUBSU.006.LK.AED
	8	825	TUBSU.008.LK.AED
	-	-	TUBSU.000.LK.AED

KATOA
Everything's Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/