

## EBAY DATASHEET SUSPENDED APPLICATION


LED | 230V/50Hz | IP65 | IK10



STANDARTS: EN 60598-1, EN 60598-2-1



### TECHNICAL DRAWING

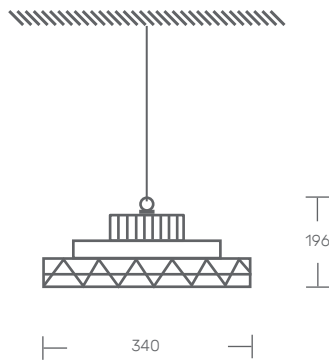

### PRODUCT DESCRIPTION

Industrial LED luminaire for suspended application.

Aluminum body.

Polycarbonate diffuser.

Light beam angle: 60°, 90° and 120°.

### LIGHT SOURCE

LED, 100-260VAC-50/60Hz.

CRI>80, FP>0.9, 50.000h of useful life.

### AVAILABLE COLOR/FINISH



2-black

### AVAILABLE LIGHT TEMPERATURE/ COLOR



4000K / 5000K

### AVAILABLE DIFFUSER



0 - opaline

### AVAILABLE DRIVER

1- HF - ON/OFF

#### EBAY

POWER (W)	FLOW (lm)	CODE
100	16000	EBAY.100.LK.AED
150	24000	EBAY.150.LK.AED
200	32000	EBAY.200.LK.AED