


## SCUTT 17 DATASHEET

SURFACE APPLICATION

LED | 24 V | IP40

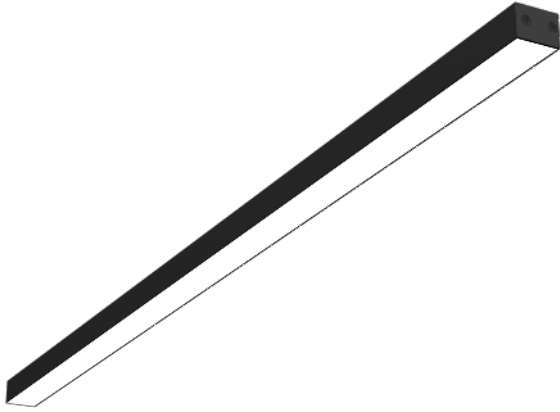

### PRODUCT DESCRIPTION

LED luminaire for surface-mounted application.

Aluminum profile, 17mm wide.

Clip-on diffuser in opal polycarbonate.

### LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.

CRI>80, 50.000h of useful life.

### AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural

### AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/3000K/4000K/6500K

### AVAILABLE DIFFUSER



0 - opaline

### AVAILABLE DRIVER

1- HF - ON/OFF

2- DIM - Flow regulation




1-3h

Available with emergency kit

STANDARTS: EN 60598-1, EN 60598-2-1



### TECHNICAL DRAWING

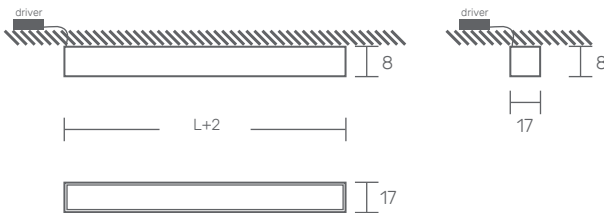

\*Profile cut dimensions without tops or tabs.

SCUTT 17			
DIMENSIONS Lx17.5x8 (mm)*	POWER (W)	FLOW (lm)	CODE
510x17.5x8	8	845	SC17.0510.LK.AED
1010x17.5x8	15	1690	SC17.1010.LK.AED
1510x17.5x8	23	2535	SC17.1510.LK.AED
2010x17.5x8	30	3380	SC17.2010.LK.AED
2510x17.5x8	38	4225	SC17.2510.LK.AED
3010x17.5x8	45	5070	SC17.3010.LK.AED
3510x17.5x8	53	5915	SC17.3510.LK.AED
4010x17.5x8	60	6760	SC17.4010.LK.AED
4510x17.5x8	68	7605	SC17.4510.LK.AED
5010x17.5x8	75	8450	SC17.5010.LK.AED

Possibility of custom lines - On request