


SCUTT SLIM 47 D DATASHEET

DOUBLE SUSPENDED APPLICATION

LED | 230V/50Hz | IP40

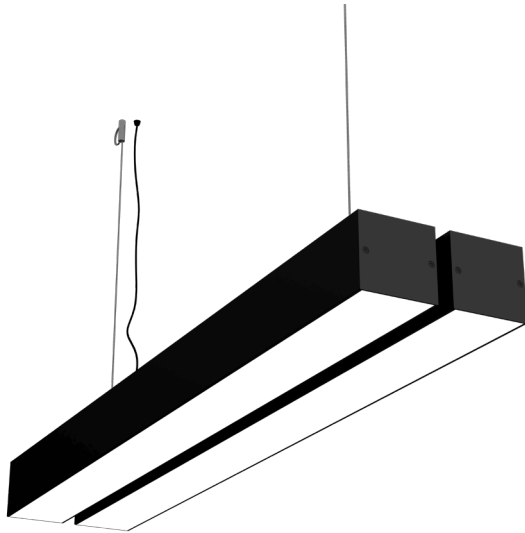


STANDARTS: EN 60598-1, EN 60598-2-1



Possibility of surface or recessed cablecup

TECHNICAL DRAWING

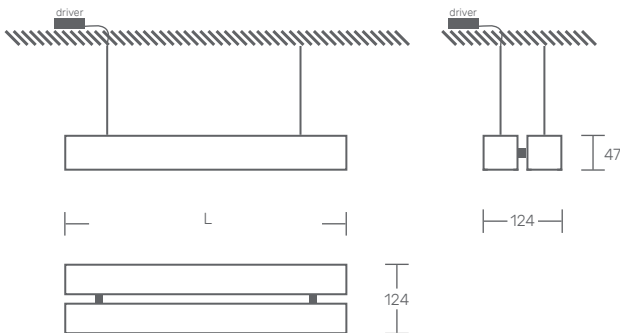

PRODUCT DESCRIPTION

Dual LED luminaire for suspended application.
Extruded anodised aluminum profile, 47mm wide.
Clip-on diffuser in opal polycarbonate.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 80.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural/ 4-anthracite/
8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



0 -opaline / N -black / P -microprismatic

AVAILABLE DRIVER

- 1- HF - ON/OFF
- 2- DALI - Flow regulation
- 3- 1-10V - Flow regulation
- 4- W - Tunable white



Available with emergency kit

1-3h

SCUTT SLIM 47 D

DIMENSIONS (mm)	POWER (w)	FLOW (lm)	CODE	DIMENSIONS (mm)	POWER (w)	FLOW (lm)	CODE
570x124x47	2X16	2X2400	SCS47D.0570.LK.AED	2390x124x47	2X68	2X10200	SCS47D.2390.LK.AED
710x124x47	2X20	2X3000	SCS47D.0710.LK.AED	2530x124x47	2X72	2X10800	SCS47D.2530.LK.AED
850x124x47	2X24	2X3600	SCS47D.0850.LK.AED	2670x124x47	2X76	2X11400	SCS47D.2670.LK.AED
990x124x47	2X28	2X4200	SCS47D.0990.LK.AED	2810x124x47	2X80	2X12000	SCS47D.2810.LK.AED
1130x124x47	2X32	2X4800	SCS47D.1130.LK.AED	2950x124x47	2X84	2X12600	SCS47D.2950.LK.AED
1270x124x47	2X36	2X5400	SCS47D.1270.LK.AED	3090x124x47	2X88	2X13200	SCS47D.3090.LK.AED
1410x124x47	2X40	2X6000	SCS47D.1410.LK.AED	3230x124x47	2X92	2X13800	SCS47D.3230.LK.AED
1550x124x47	2X44	2X6600	SCS47D.1550.LK.AED	3370x124x47	2X96	2X14400	SCS47D.3370.LK.AED
1690x124x47	2X48	2X7200	SCS47D.1690.LK.AED	3510x124x47	2X100	2X15000	SCS47D.3510.LK.AED
1830x124x47	2X52	2X7800	SCS47D.1830.LK.AED	3650x124x47	2X104	2X15600	SCS47D.3650.LK.AED
1970x124x47	2X56	2X8400	SCS47D.1970.LK.AED	3790x124x47	2X108	2X16200	SCS47D.3790.LK.AED
2110x124x47	2X60	2X9000	SCS47D.2110.LK.AED	3930x124x47	2X112	2X16800	SCS47D.3930.LK.AED
2250x124x47	2X64	2X9600	SCS47D.2250.LK.AED				

Possibility of custom lines - On request