


SCUTT SLIM 47 S DATASHEET

SUSPENDED APPLICATION

LED | 230V/50Hz | IP40

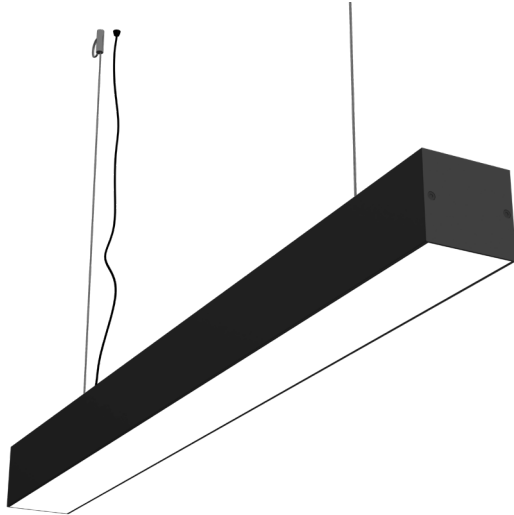


STANDARTS: EN 60598-1, EN 60598-2-1



Possibility of surface or recessed cablecup

TECHNICAL DRAWING

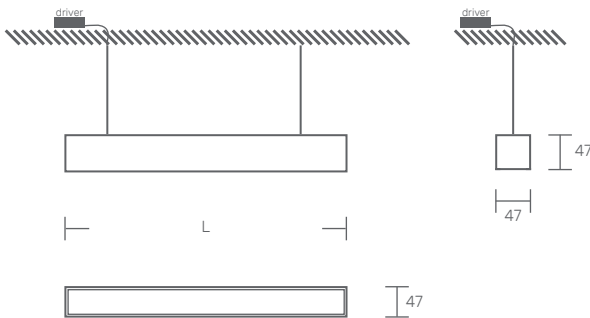

PRODUCT DESCRIPTION

LED luminaire for suspended ceiling application.

Extruded anodised aluminum profile, 47mm wide.

Clip-on diffuser in opal polycarbonate.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.

CRI>80, 80.000h useful life.

@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural/ 4-anthracite/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



O -opaline / N -black / P -microprismatic

AVAILABLE DRIVER

1- HF - ON/OFF

2- DALI - Flow regulation

3- 1-10V - Flow regulation

4- W - Tunable white



Available with emergency kit

1-3h

SCUTT SLIM 47 S

DIMENSIONS (mm)	POWER (w)	FLOW (lm)	CODE	DIMENSIONS (mm)	POWER (w)	FLOW (lm)	CODE
570x47x47	16	2400	SCS47S.0570.LK.AED	2390x47x47	68	10200	SCS47S.2390.LK.AED
710x47x47	20	3000	SCS47S.0710.LK.AED	2530x47x47	72	10800	SCS47S.2530.LK.AED
850x47x47	24	3600	SCS47S.0850.LK.AED	2670x47x47	76	11400	SCS47S.2670.LK.AED
990x47x47	28	4200	SCS47S.0990.LK.AED	2810x47x47	80	12000	SCS47S.2810.LK.AED
1130x47x47	32	4800	SCS47S.1130.LK.AED	2950x47x47	84	12600	SCS47S.2950.LK.AED
1270x47x47	36	5400	SCS47S.1270.LK.AED	3090x47x47	88	13200	SCS47S.3090.LK.AED
1410x47x47	40	6000	SCS47S.1410.LK.AED	3230x47x47	92	13800	SCS47S.3230.LK.AED
1550x47x47	44	6600	SCS47S.1550.LK.AED	3370x47x47	96	14400	SCS47S.3370.LK.AED
1690x47x47	48	7200	SCS47S.1690.LK.AED	3510x47x47	100	15000	SCS47S.3510.LK.AED
1830x47x47	52	7800	SCS47S.1830.LK.AED	3650x47x47	104	15600	SCS47S.3650.LK.AED
1970x47x47	56	8400	SCS47S.1970.LK.AED	3790x47x47	108	16200	SCS47S.3790.LK.AED
2110x47x47	60	9000	SCS47S.2110.LK.AED	3930x47x47	112	16800	SCS47S.3930.LK.AED
2250x47x47	64	9600	SCS47S.2250.LK.AED				

Possibility of custom lines - On request