


## HALO S DATASHEET

### SUSPENDED APPLICATION

LED | 230V/50Hz | IP40

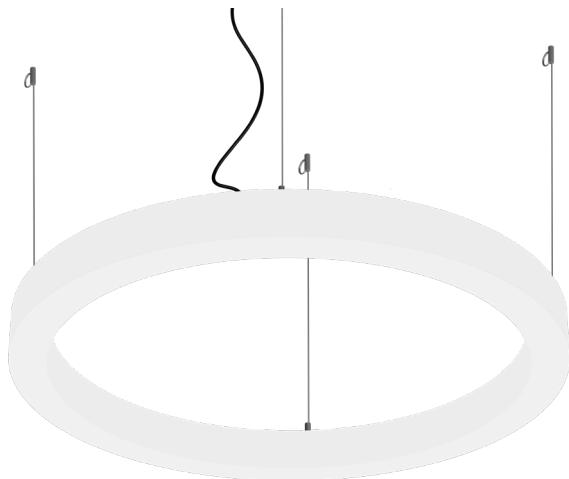


STANDARTS: EN 60598-1, EN 60598-2-1



Possibility of surface or recessed cablecup.

### TECHNICAL DRAWING

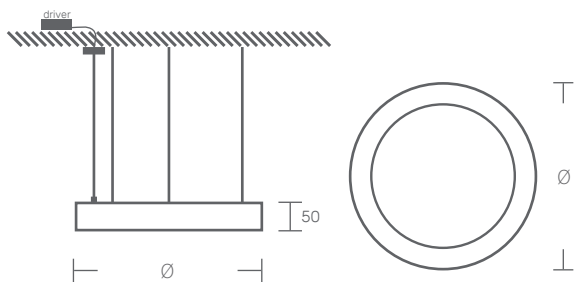

### PRODUCT DESCRIPTION

Circular LED luminaire for suspended application.

Body and diffuser in opaline polycarbonate.

### LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.

CRI>80, 80.000h of useful life.

@L90, B10, Ta 25°.

### AVAILABLE COLOR/FINISH



0- opal

### AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

### AVAILABLE DIFFUSER



0 -opaline

### AVAILABLE DRIVER

1- HF - ON/OFF

2- DALI - Flow regulation

3- 1-10V - Flow regulation

4- W - Tunable white

### HALO S

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
Ø620x50x50	48	8400	HALOS62.048.LK.AED
Ø920x50x50	72	12600	HALOS92.072.LK.AED
Ø1220x50x50	168	16800	HALOS12.168.LK.AED