DEL DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP40



STANDARTS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

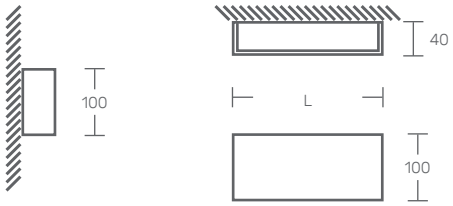

PRODUCT DESCRIPTION

LED luminaire for surface mounting on the wall.
Lacquered galvanized steel body.

LIGHT SOURCE

Driver LED, 220-240VAC -50/60Hz
CRI>80, 100.000h of useful life.
@L90, B10, Ta25°C

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 4-anthracite/ 6-grey/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



O -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - flow regulation
3- 1-10V - flow regulation
4- W - Bluetooth/Wifi

*W (bluetooth/wifi) from 600mm
*DALI and 1-10V driver/equipment from 320mm

DEL

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
180x100x40	4	700	DEL18.004.LK.AED
180x100x40	8	1400	DEL18.008.LK.AED
320x100x40	8	1400	DEL32.008.LK.AED
320x100x40	16	2800	DEL32.016.LK.AED
600x100x40	16	2800	DEL60.016.LK.AED
600x100x40	32	5600	DEL60.032.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/