LAB E DATASHEET

RECESSED APPLICATION

LED | 230V/50Hz | IP65

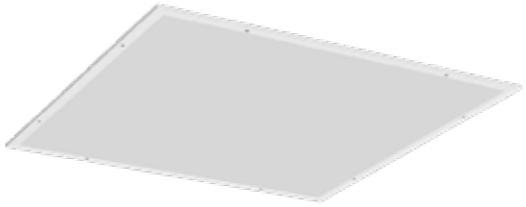

STANDARTS: EN 60598-1, EN 60598-2-1

C1 275x1175 C2 275x1475 C3 575x575

TECHNICAL DRAWING

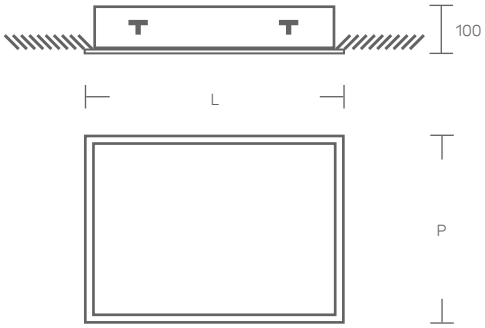

PRODUCT DESCRIPTION

LED luminaire for recessed application, with trim.
Lacquered steel body.
Opal polycarbonate diffuser.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 80.000h of useful life.
@L90, B10, Ta 25°C, UGR<19

AVAILABLE COLOR/FINISH

1-white

AVAILABLE LIGHT TEMPERATURE/ COLOR

TW

2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
4- W - Bluetooth/Wifi

LAB E

	DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
C1	297x1197x100	28	4900	LAB30E.028.LK.AED
C1	297x1197x100	42	7200	LAB30E.042.LK.AED
C2	297x1497x100	43	6125	LAB30E.043.LK.AED
C2	297x1497x100	87	9000	LAB30E.087.LK.AED
C3	597x597x100	28	4900	LAB60E.028.LK.AED
C3	597x597x100	42	7200	LAB60E.042.LK.AED

KATOA Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/