LAB DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP65



PRODUCT DESCRIPTION

LED luminaire for surface-mounted application.
Lacquered steel body.
Opal polycarbonate diffuser.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 80.000h of useful life.
@L90, B10, Ta 25°C, UGR<19

AVAILABLE COLOR/FINISH

1-white

STANDARTS: EN 60598-1, EN 60598-2-1

AVAILABLE LIGHT TEMPERATURE/ COLOR

TW

2700K/ 3000K/ 4000K/ 6500K/ TW

TECHNICAL DRAWING

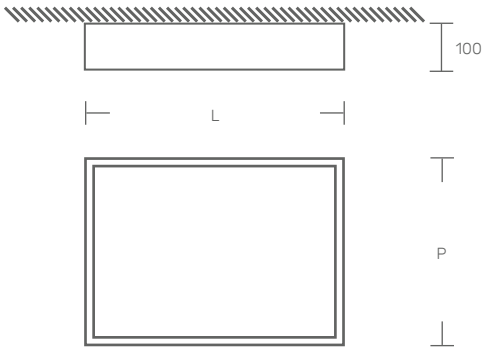

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
4- W - Bluetooth / Wifi

LAB

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
297x1197x100	28	4900	LAB30.028.LK.AED
297x1197x100	42	7200	LAB30.042.LK.AED
297x1497x100	43	6125	LAB30.043.LK.AED
297x1497x100	87	9000	LAB30.087.LK.AED
597x597x100	28	4900	LAB60.028.LK.AED
597x597x100	42	7200	LAB60.042.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/