KATOA

MINI PIPE S DATASHEET

SUSPENDED APPLICATION

LED | 230V/50Hz | IP43



PRODUCT DESCRIPTION

LED tubular luminaire for suspended application.
Body with 38mm in diameter in opal polycarbonate. Painted aluminum tops.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 100.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 4-anthracite/ 6-grey

AVAILABLE LIGHT TEMPERATURE/COLOR

2700K/ 3000K/ 4000K/ 6500K

STANDARTS: EN 60598-1, EN 60598-2-1

180°

AVAILABLE DIFFUSER

O -opaline

TECHNICAL DRAWING

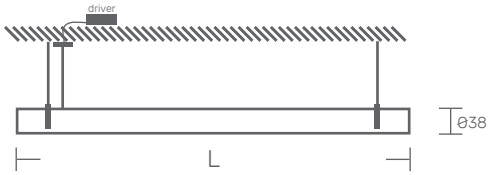

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation
4- W - Bluetooth / Wifi

AVAILABLE APPLICATION



1-garra

AVAILABLE CABLECUP



Surface(standard)
ø56x20mm
code: FL.SAL.56



Recessed
ø56mm
code:FL.ENC.56



Surface for driver
403x40x40mm
code:FL.LIN.403.DR

MINI PIPE S

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
600	16	2800	MPIPES.0600.LK.AED
740	20	3500	MPIPES.0740.LK.AED
880	24	4200	MPIPES.0880.LK.AED
1020	28	4900	MPIPES.1020.LK.AED
1160	32	5600	MPIPES.1160.LK.AED
1300	36	6300	MPIPES.1300.LK.AED
1440	40	7000	MPIPES.1440.LK.AED
1580	44	7700	MPIPES.1580.LK.AED
1720	48	8400	MPIPES.1720.LK.AED
1860	52	9100	MPIPES.1860.LK.AED
2000	56	9800	MPIPES.2000.LK.AED

Possibilidade de linhas à medida - Sob consulta

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/

version 5
112026