MINI PIPE DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP43

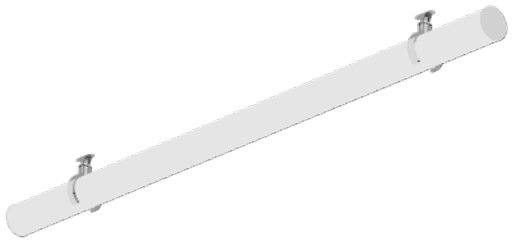

STANDARTS: EN 60598-1, EN 60598-2-1

180°

TECHNICAL DRAWING

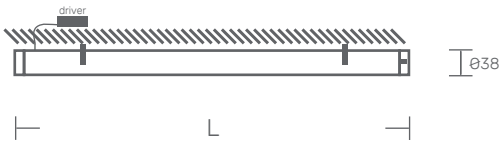

AVAILABLE APPLICATION



1-claw*

*horizontal mounting only

PRODUCT DESCRIPTION

LED tubular luminaire for surface application. Body with 38mm in diameter in opal polycarbonate. Painted aluminum tops.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 100.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 4-anthracite/ 6-grey

AVAILABLE LIGHT TEMPERATURE/COLOR

2700K/ 3000K/ 4000K/ 6500K

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation

MINI PIPE

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
600	16	2800	MPIPE.0600.LK.AED
740	20	3500	MPIPE.0740.LK.AED
880	24	4200	MPIPE.0880.LK.AED
1020	28	4900	MPIPE.1020.LK.AED
1160	32	5600	MPIPE.1160.LK.AED
1300	36	6300	MPIPE.1300.LK.AED
1440	40	7000	MPIPE.1440.LK.AED
1580	44	7700	MPIPE.1580.LK.AED
1720	48	8400	MPIPE.1720.LK.AED
1860	52	9100	MPIPE.1860.LK.AED
2000	56	9800	MPIPE.2000.LK.AED

Possibilidade de linhas à medida - Sob consulta

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/