


PIPE DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP43

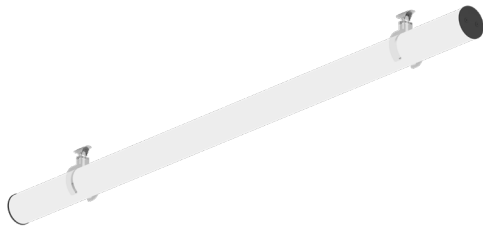

STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING



AVAILABLE APPLICATION



1-claw



2-ring



3-clip

PRODUCT DESCRIPTION

LED tubular luminaire for surface application. Body with 50mm in diameter in opal polycarbonate. Tops in lacquered anodised extruded aluminum.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 80.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH



0-opal/ 1-white/ 2-black/ 4-anthracite/
5-brushed/ 6-grey

AVAILABLE LIGHT TEMPERATURE/COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



0 -opaline

AVAILABLE DRIVER

- 1- HF - ON/OFF
- 2- DALI - Flow regulation
- 3- 1-10V - Flow regulation
- 4- W - Tunable white

PIPE

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
600	16	2800	PIPE.0600.LK.AED
740	20	3500	PIPE.0740.LK.AED
880	24	4200	PIPE.0880.LK.AED
1020	28	4900	PIPE.1020.LK.AED
1160	32	5600	PIPE.1160.LK.AED
1300	36	6300	PIPE.1300.LK.AED
1440	40	7000	PIPE.1440.LK.AED
1580	44	7700	PIPE.1580.LK.AED
1720	48	8400	PIPE.1720.LK.AED

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
1860	52	9100	PIPE.1860.LK.AED
2000	56	9800	PIPE.2000.LK.AED
2140	60	10500	PIPE.2140.LK.AED
2280	64	11200	PIPE.2280.LK.AED
2420	68	11900	PIPE.2420.LK.AED
2560	72	12600	PIPE.2560.LK.AED
2700	76	13300	PIPE.2700.LK.AED
2840	80	14000	PIPE.2840.LK.AED
2980	84	14700	PIPE.2980.LK.AED

Possibility of custom lines - On request