PUNTO Q O

DATASHEET

RECESSED APPLICATION

LED | 230V/50Hz | IP44



STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

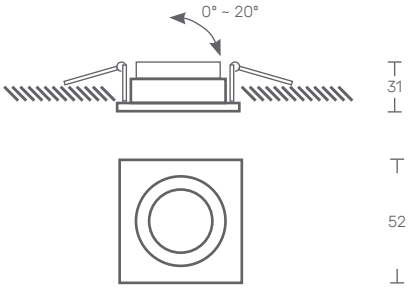

PRODUCT DESCRIPTION

LED luminaire for recessed application, with trim.
Epoxy polyester lacquered aluminum body.
Light beam opening angle: 40°

LIGHT SOURCE

LED 3W
Driver LED, 20-240VAC - 50/60Hz.
CRI>80, 25.000h of useful life.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 6-grey

AVAILABLE LIGHT TEMPERATURE/ COLOR



3000K/ 4000K

AVAILABLE DIFFUSER



T - transparent

AVAILABLE DRIVER

1- HF - ON/OFF

PUNTO Q O

POWER (W)	FLOW (lm)	CODE
3	180	PUNTOQO.003.LK.AED

KATOA
Everything's Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/