


SCUTT 17 E IP DATASHEET

RECESSED APPLICATION

LED | 24 V | IP67

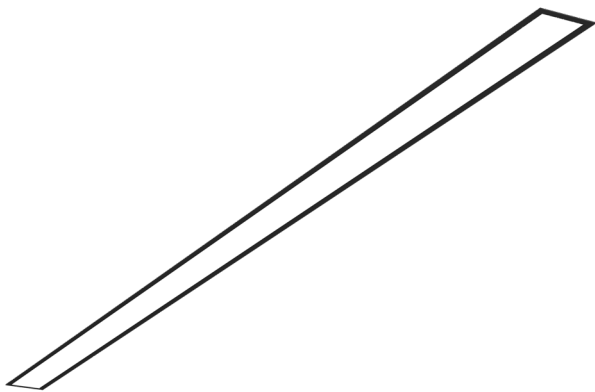

PRODUCT DESCRIPTION

LED luminaire for recessed application with trim.

Extruded anodised aluminum profile 17mm wide and 24mm with finial trim.

Clip-on diffuser in opal polycarbonate.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.

CRI>80, 50.000h of useful life.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/3000K/4000K/6500K

AVAILABLE DIFFUSER



0 - opaline

AVAILABLE DRIVER

1- HF - ON/OFF

2- DIM - Flow regulation



Available with emergency kit


1-3h

STANDARTS: EN 60598-1, EN 60598-2-1



17xL

TECHNICAL DRAWING

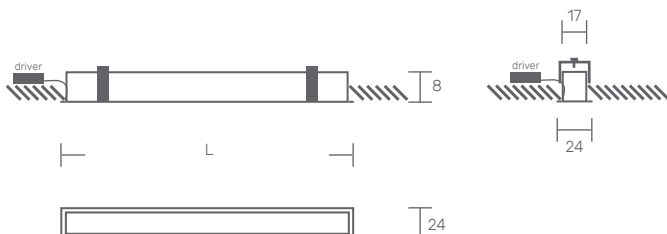

SCUTT 17 E IP

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
510x17.5x8	8	845	SC17EIP.0510.LK.AED
1010x17.5x8	15	1690	SC17EIP.1010.LK.AED
1510x17.5x8	23	2535	SC17EIP.1510.LK.AED
2010x17.5x8	30	3380	SC17EIP.2010.LK.AED
2510x17.5x8	38	4225	SC17EIP.2510.LK.AED
3010x17.5x8	45	5070	SC17EIP.3010.LK.AED
3510x17.5x8	53	5915	SC17EIP.3510.LK.AED
4010x17.5x8	60	6760	SC17EIP.4010.LK.AED
4510x17.5x8	68	7605	SC17EIP.4510.LK.AED
5010x17.5x8	75	8450	SC17EIP.5010.LK.AED

Possibility of custom lines - On request