


SCUTT 30 E IP DATASHEET

RECESSED APPLICATION


LED | 24V | IP67

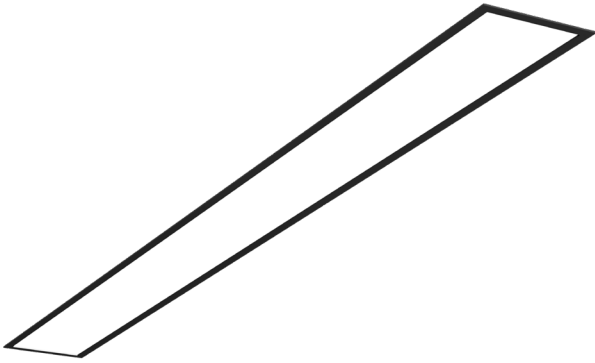

STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

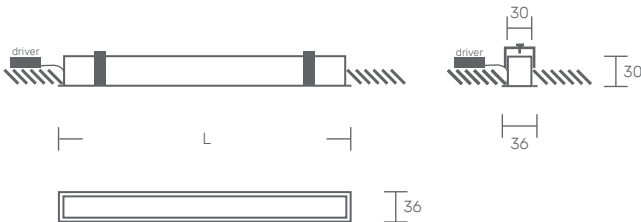

PRODUCT DESCRIPTION

LED luminaire for recessed application with trim.

Anodized extruded aluminum profile, 30mm wide and 36mm with finial trim. Clip-on diffuser in opal polycarbonate.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 80.000h of useful life.
@L90, B10, Ta 25°C.

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural/ 4-anthracite/
8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



0 -opaline / N -black

AVAILABLE DRIVER

- 1- HF - ON/OFF
- 2- DALI - Flow regulation
- 3- 1-10V - Flow regulation
- 4- W - Tunable white



Available with emergency kit

1-3h

SCUTT 30 E IP

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
510x30x30	8	845	SC30EIP.0510.LK.AED
1010x30x30	15	1690	SC30EIP.1010.LK.AED
1510x30x30	23	2535	SC30EIP.1510.LK.AED
2010x30x30	30	3380	SC30EIP.2010.LK.AED
2510x30x30	38	4225	SC30EIP.2510.LK.AED
3010x30x30	45	5070	SC30EIP.3010.LK.AED
3510x30x30	53	5915	SC30EIP.3510.LK.AED
4010x30x30	60	6760	SC30EIP.4010.LK.AED
4510x30x30	68	7605	SC30EIP.4510.LK.AED
5010x30x30	75	8450	SC30EIP.5010.LK.AED

Possibility of custom lines - On request