

SCUTT 3R DATASHEET

SURFACE APPLICATION


LED | 230V/50Hz | IP40



STANDARTS: EN 60598-1, EN 60598-2-1



TECHNICAL DRAWING

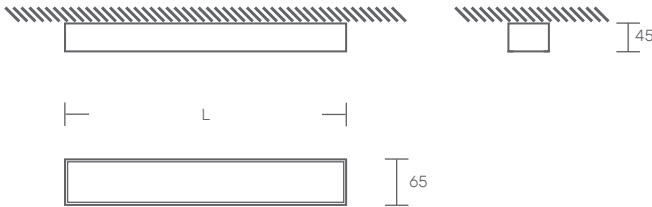

PRODUCT DESCRIPTION

LED luminaire for surface-mounted application.

Anodised extruded aluminum profile, 65mm wide

Diffuser with lenses.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.

CRI>80, 80.000h of useful life.

@L90, B10, Ta 25°, UGR<90

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 3-natural

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K

AVAILABLE DIFFUSER



L - lenses

AVAILABLE DRIVER

1- HF - ON/OFF

2- DALI - Flow regulation

3- 1-10V - Flow regulation

SCUTT 3R

DIMENSIONS (mm)	POWER (w)	FLOW (lm)	CODE
575x65x45	22	3600	SC3R.0575.LK.AED
575x65x45	34	5050	SC3R.0575.LK.AED
860x65x45	33	5400	SC3R.0860.LK.AED
860x65x45	50	7600	SC3R.0860.LK.AED
1145x65x45	44	7200	SC3R.1145.LK.AED
1145x65x45	68	10100	SC3R.1145.LK.AED
1430x65x45	55	9000	SC3R.1430.LK.AED
1430x65x45	80	12500	SC3R.1430.LK.AED

Possibility of customized lines - On request