SOS 36 IP

DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP67

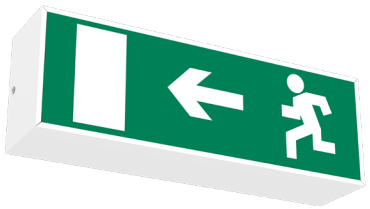

STANDARTS: EN 60598-1, EN 60598-2-1, EN 60598-2-22

1-3h

TECHNICAL DRAWING

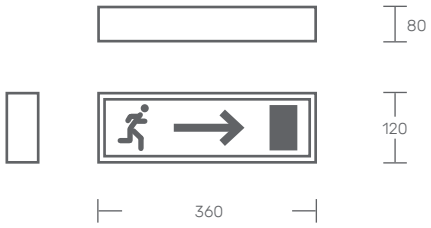

PRODUCT DESCRIPTION

LED emergency exit luminaire with pictogram for surface mounting on the wall.
Extruded aluminum body lacquered in epoxy polyester. Polycarbonate diffuser.
Permanent and non-permanent operating mode.
Built-in battery with autonomy of 1h or 3h in emergency mode.

LIGHT SOURCE

LED, 220-240VAC-50/60Hz.
CRI>80, L80, B10, Ta25°C.
65.000h of useful life.

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 3-natural/ 4-anthracite

AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K / 3000K / 4000K / 6500K

AVAILABLE DIFFUSER

0 - opaline

AVAILABLE DRIVER

1- HF - ON/OFF

SOS 36 IP

POWER (W)	FLOW (lm)	CODE
8	1100	SOS36IP.008.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/