TOP 47 S DATASHEET

SUSPENDED APPLICATION

LED | 230V/50Hz | IP20

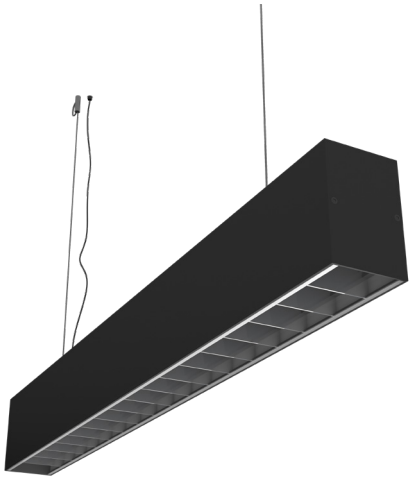

STANDARTS: EN 60598-1, EN 60598-2-1

Possibility of surface or recessed cablecup

TECHNICAL DRAWING

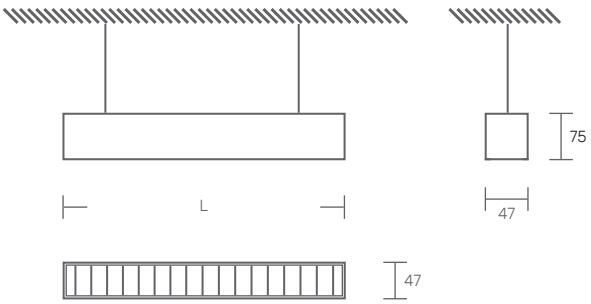

PRODUCT DESCRIPTION

LED luminaire for suspended ceiling application.
Extruded anodised aluminum profile, 47mm wide.
Shiny aluminum diffuser.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 80.000h of useful life.
@L90, B10, Ta 25°, UGR <19

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 3-natural/ 4-anthracite/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

TW

2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER

A - shiny parabolic aluminum

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation
4- W - Tunable white

1-3h Available with emergency kit

TOP 47 S

DIMENSÕES (mm)	POTÊNCIA (W)	FLUXO (lm)	CÓDIGO
566x47x75	16	2800	TOP47S.0566.LK.AED
846x47x75	24	4200	TOP47S.0846.LK.AED
1126x47x75	32	5600	TOP47S.1126.LK.AED
1406x47x75	40	7000	TOP47S.1406.LK.AED

Possibility of custom lines - On request

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/