TOP 47 DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP20



STANDARTS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

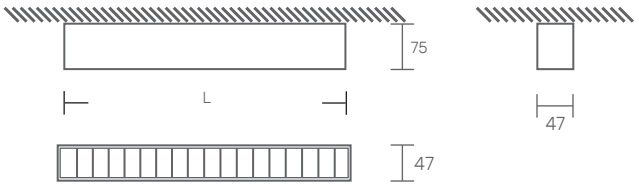

PRODUCT DESCRIPTION

LED luminaire for surface-mounted application.
Extruded anodised aluminum profile, 47mm wide.
Shiny aluminum diffuser.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 80.000h of useful life.
@L90, B10, Ta 25°, UGR <19

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 3-natural/ 4-anthracite/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

TW

2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER

A - shiny parabolic aluminum

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation
4- W - Tunable white

1-3h Available with emergency kit

TOP 47

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
566x47x75	16	2800	TOP47.0566.LK.AED
846x47x75	24	4200	TOP47.0846.LK.AED
1126x47x75	32	5600	TOP47.1126.LK.AED
1406x47x75	40	7000	TOP47.1406.LK.AED

Possibility of custom lines - On request

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/