EME ST DATASHEET

RECESSED SUSPENDED APPLICATION

LED | 230V/50Hz | IP40 | IK04

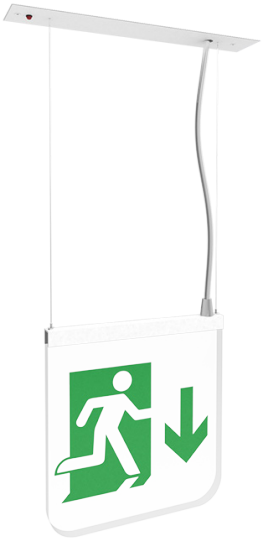

STANDARDS: EN 60598-1, EN 60598-2-1, EN 60598-2-22

1-3h 275x47

TECHNICAL DRAWING

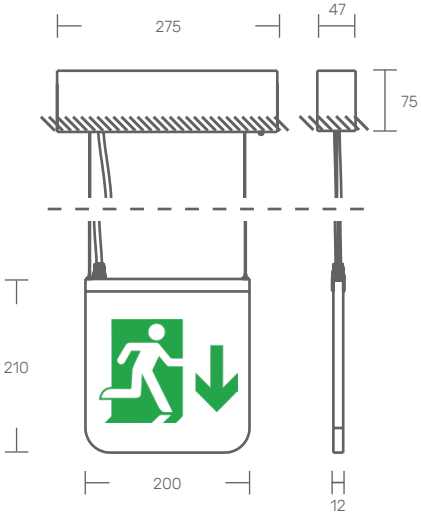

PRODUCT DESCRIPTION

LED emergency exit light with laser engraved pictogram in suspended crystalline acrylic. Extruded aluminum body lacquered with epoxy polyester, for recessed application, without trim.
Permanent and non-permanent operating mode.
Built-in battery with autonomy of 1h or 3h in emergency mode.

LIGHT SOURCE

LED, 220-240VAC-50/60Hz.
CRI>80, L80, B10, Ta25°C, 65.000h of useful life.

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 3-natural/ 4-anthracite

AVAILABLE LIGHT TEMPERATURE/COLOR

green

AVAILABLE DRIVER

1- HF - ON/OFF

EME ST

POWER (W)	FLOW (lm)	CODE
4	670	EMEST.004.LG.AED

KATOA Everything is Lighting
Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal
+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/