# SKY IN DATASHEET

SUSPENDED APPLICATION

LED | 24V | IP40

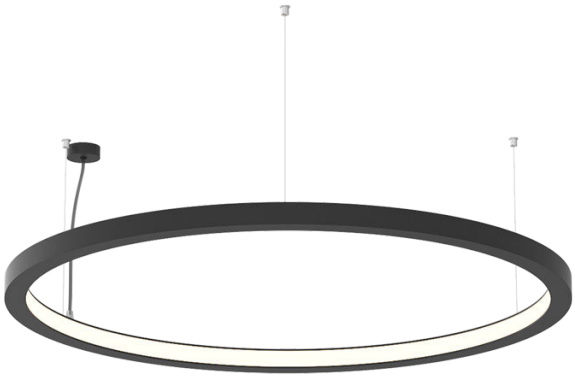

STANDARDS: EN 60598-1, EN 60598-2-1

## TECHNICAL DRAWING

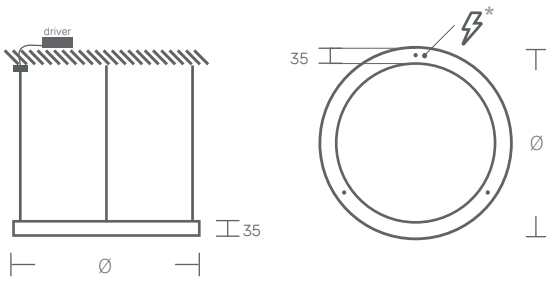


* electrical supply

## PRODUCT DESCRIPTION

Circular LED luminaire for suspended application, internal light.
Lacquered aluminum body.
Diffuser in opal silicone.

## LIGHT SOURCE

Driver LED, 24V.
CRI>80, 50.000h of useful life.

## AVAILABLE COLOR/FINISH

1- white/ 2-black/ 4-anthracite/ 6-grey/ 8- RAL

## AVAILABLE LIGHT TEMPERATURE/COLOR

TW

2700K/ 3000K/ 4000K/ 6500K

## AVAILABLE DIFFUSER

0 -opaline

## AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
4- W - Bluetooth / Wifi

## AVAILABLE CABLECUP



Surface
Ø56x20mm
(standard, white)
code: FL.SAL.56



Recessed
Ø56mm
Code: FL.ENC.56
Cutout: Ø50mm



Surface for driver
Ø250x30mm
code: FL.RED.250.DR
Ø350x45mm
code: FL.RED.350.DR

**SKY IN**

| DIMENSIONS(mm) | POWER (W) | FLOW (lm) | CODE |
|---|---|---|---|
| Ø620x35x35 | 29 | 3290 | SKYIN.0620.LK.AED |
| Ø920x35x35 | 43 | 4880 | SKYIN.0920.LK.AED |
| Ø1220x35x35 | 57 | 6470 | SKYIN.1220.LK.AED |
| Ø1520x35x35 | 71 | 8070 | SKYIN.1520.LK.AED |

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/

version 4
112026