SKY OUT

DATASHEET

SUSPENDED APPLICATION

LED | 24V | IP40

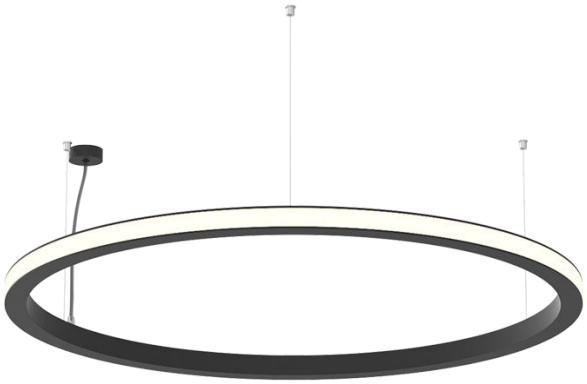

STANDARDS: EN 60598-1, EN 60598-2-1

PRODUCT DESCRIPTION

Circular LED luminaire for suspended application, external light.
Lacquered aluminum body.
Diffuser in opal silicone.

LIGHT SOURCE

Driver LED, 24V.
CRI>80, 50.000h of useful life.

AVAILABLE COLOR/FINISH

1- white/ 2-black/ 4-anthracite/ 6-grey/ 8- RAL

AVAILABLE LIGHT TEMPERATURE/COLOR

TW

2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
4- W - Bluetooth / Wifi

TECHNICAL DRAWING

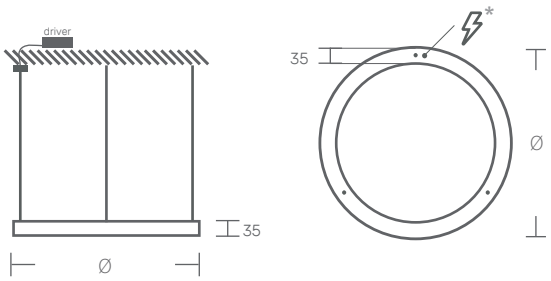

* electrical supply

AVAILABLE CABLECUP



Surface
Ø56x20mm
(standard, white)
code: FL.SAL.56



Recessed
Ø56mm
Code: FL.ENC.56
Cutout: Ø50mm



Surface for driver
Ø250x30mm
code: FL.RED.250.DR
Ø350x45mm
code: FL.RED.350.DR

SKY OUT

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
Ø625x35x35	29	3290	SKYOUT.0620.LK.AED
Ø920x35x35	43	4880	SKYOUT.0920.LK.AED
Ø1220x35x35	57	6470	SKYOUT.1220.LK.AED
Ø1520x35x35	71	8070	SKYOUT.1520.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/

version 4
112026