SKY DATASHEET

SUSPENDED APPLICATION

LED | 230V/50Hz | IP40

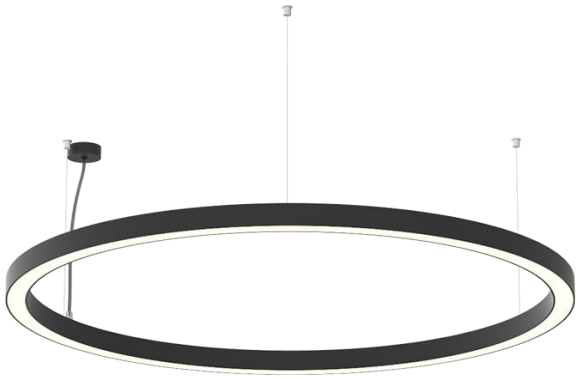

STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

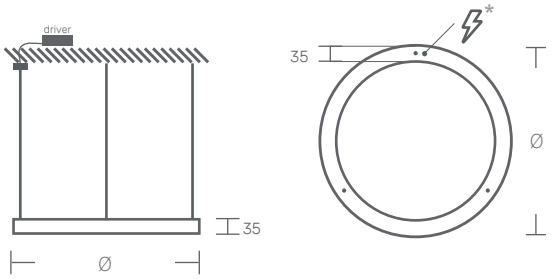

* electrical supply

PRODUCT DESCRIPTION

Circular LED luminaire for suspended application.
Lacquered aluminum body.
Diffuser in opal silicone.

LIGHT SOURCE

Driver LED, 220-240V / 50-60Hz.
CRI>80, 100.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH



1- white/ 2-black/ 4-anthracite/ 6-grey/
8- RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



O -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
4- W - Bluetooth / Wifi

AVAILABLE CABLECUP



Surface
Ø56x20mm
(standard, white)
code: FL.SAL.56



Recessed
Ø56mm
Code: FL.ENC.56
Cutout: Ø50mm



Surface for driver
Ø250x30mm
code: FL.RED.250.DR
Ø350x45mm
code: FL.RED.350.DR

SKY

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
Ø625x35x35	52	9100	SKY.0620.LK.AED
Ø920x35x35	78	13650	SKY.0920.LK.AED
Ø1220x35x35	104	18200	SKY.1220.LK.AED
Ø1520x35x35	132	23100	SKY.1520.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/

version 5
112026