SKY SU OUT

DATASHEET

SURFACE APPLICATION

LED | 24V | IP40



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

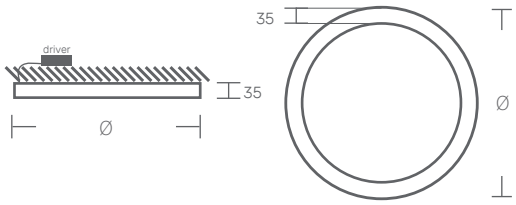

PRODUCT DESCRIPTION

Circular LED luminaire for surface application, external light.
Lacquered aluminum body.
Opal silicone diffuser.

LIGHT SOURCE

Driver LED, 24V.
CRI>80, 50.000h of useful life.

AVAILABLE COLOR/FINISH

1- white/ 2-black/ 4-anthracite/ 6-grey/ 8- RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

TW

2700K/ 3000K/ 4000K/ 6500K

AVAILABLE DIFFUSER

O -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
4- W - Bluetooth / Wifi

SKY SU OUT

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
Ø625x35x35	29	3290	SKYSUO.0620.LK.AED
Ø920x35x35	43	4880	SKYSUO.0920.LK.AED
Ø1220x35x35	57	6470	SKYSUO.1220.LK.AED
Ø1520x35x35	71	8070	SKYSUO.1520.LK.AED

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/

version 1
112026