SKY SU DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP40



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

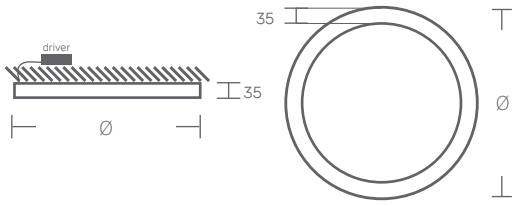

PRODUCT DESCRIPTION

Circular LED luminaire for surface application.
Lacquered aluminum body.
Opal silicone diffuser.

LIGHT SOURCE

Driver LED, 220-240V / 50-60Hz.
CRI>80, 100.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH

1- white/ 2-black/ 4-anthracite/ 6-grey/
8- RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation
4- W - Bluetooth / Wifi

SKY SU

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
Ø625x35x35	52	9100	SKYSU.0620.LK.AED
Ø920x35x35	78	13650	SKYSU.0920.LK.AED
Ø1220x35x35	104	18200	SKYSU.1220.LK.AED
Ø1520x35x35	132	23100	SKYSU.1520.LK.AED

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/

version 3
112026