LEN DATASHEET

MODULAR APPLICATION

LED | 230V/50Hz | IP40



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

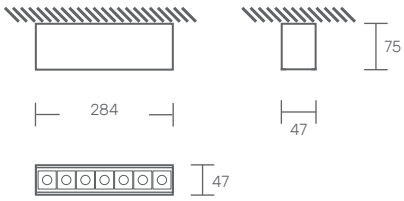

PRODUCT DESCRIPTION

LED module for application in the SCUTT 47 family, across the entire range. PMMA lens and polycarbonate shade.
Available beam angle: 50°.
Possibility of surface and suspended application.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>90, 100.000h of useful life.
@L70, B50, Ta 25°.

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 3-natural/ 4-anthracite/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K/3000K/ 4000K

AVAILABLE SHADE COLOR

B -white / N -black

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation

LEN

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
284x47x75	8	1476	LEN.008.LK.AED

Possibility of custom lines - On request

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/